



## BELT CONVEYORS

# BELT CONVEYORS

Akyurek Belt conveyor type T.BELT-014 is made up of standard elements which, when correctly combined, can easily be fitted into any conveying installation.

The Akyurek Belt Conveyor is manufactured in galvanized steel and or Painted and designed in a light and easy-to-assemble modular system.


Type T.BELT-014 is designed with guide rollers which is quiet and have low power consumption in relation to their capacity. There is also a possibility for transport at an upward angle of up to 30° using carriers. The Belt conveyors is well-suited to safe and effective transportation of most materials.

## Standard equipment:

- Directly mounted gear motor
- Belt Support rollers
- Returning rollers
- Belt Tensioner
- Profile Constructed Body
- Suitable Belt for requested Task
- Painted Body


## Accessories:

- Inlet hoppers
- Outlet skirts/outlet hoppers
- Cover for top/bottom
- Speed control monitor
- Runners for adjustable support fittings
- Belt guide rollers
- Belt scraper internal
- Belt scraper external
- Side extensions
- Oil resistant belt
- Outlet divider
- Automated Tensioner
- Galvanized Body

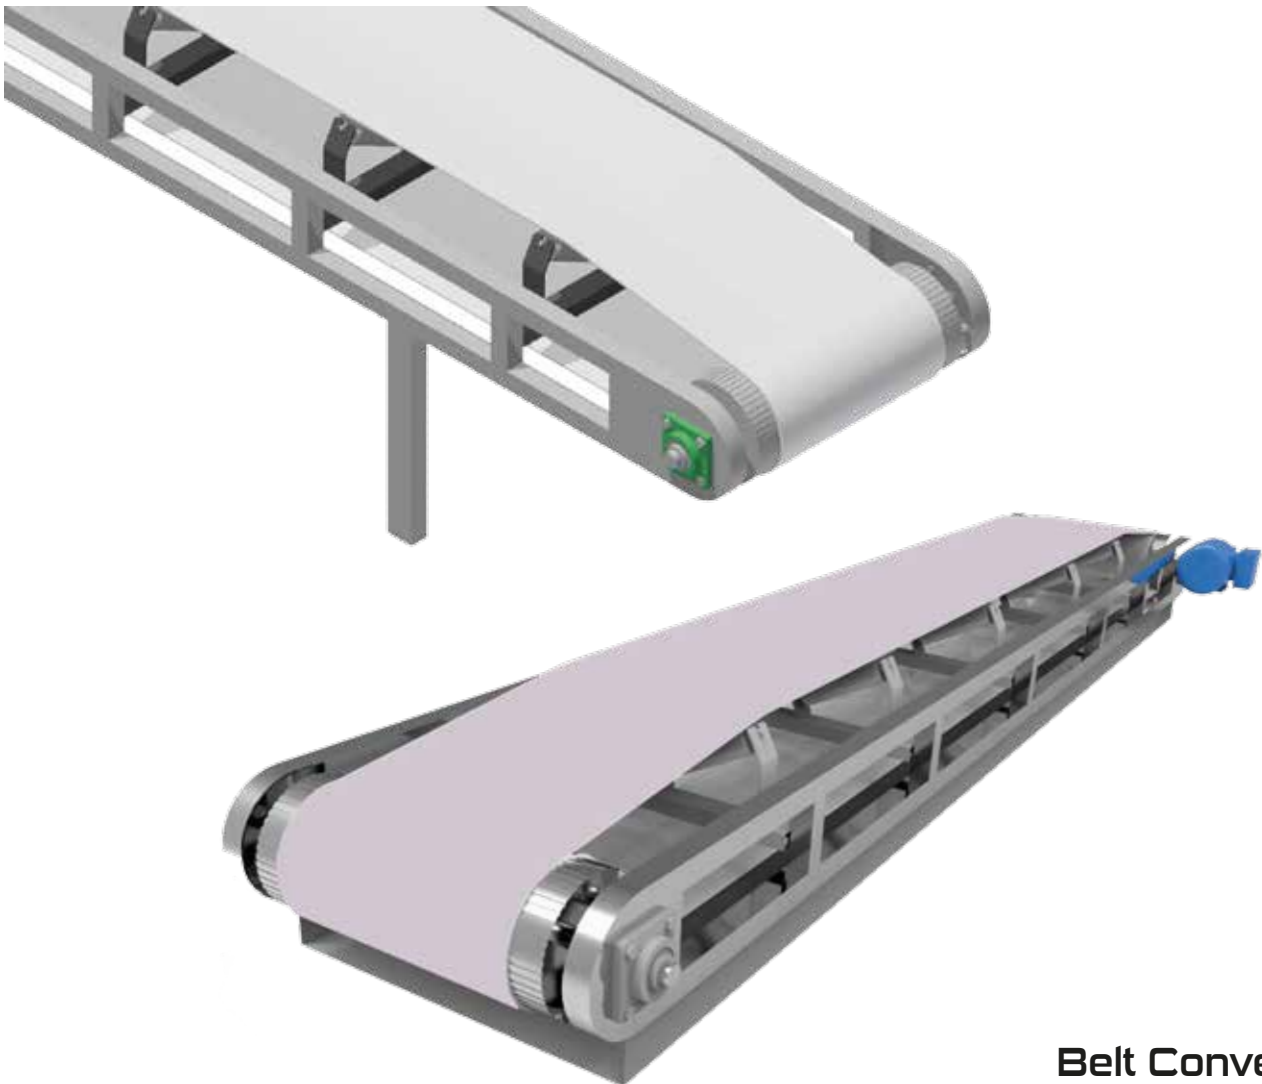


**Belt Conveyors**


MODEL	T.BELT 023-30		
Belt Length (meter)	0-3	4-6	6-10
Belt Width (mm)	300		
Motor (kW-RPM)	0.37-70	0.55-70	0.75-70
Distance Between Rolls (Sheet Body) (mm)	530		
Distance Between Rolls (Profile Body) (mm)	500		
Capacity [m <sup>3</sup> /hour] (tph)	5 to 10		




MODEL	T.BELT 023-40					
Belt Length (meter)	0-3	3,5-6	6,5-9	9,5-14	14,5-25	25,5-35
Belt Width (mm)	400					
Motor (kW-RPM)	0,55-70	0,75-70	1,1-70	1,5-70	2,2-70	3-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m <sup>3</sup> /hour] (tph)	10 to 15					




MODEL	T.BELT 023-50					
Belt Length (meter)	0-3	3,5-6	6,5-9	9,5-14	14,5-25	25,5-35
Belt Width (mm)	500					
Motor (kW-RPM)	0,75-70	1,1-70	1,5-70	2,2-70	3-70	4-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m <sup>3</sup> /hour] (tph)	15 to 25					




MODEL	T.BELT 023-60					
Belt Length (meter)	0-4	4,5-6	6,5-8	8,5-10	10,5-14	14,5-24
Belt Width (mm)	500					
Motor (kW-RPM)	1,1-70	1,5-70	2,2-70	3-70	4-70	5,5-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m <sup>3</sup> /hour] (tph)	25 to 35					



MODEL	T.BELT 023-80					
Belt Length (meter)	0-4	4,5-6	6,5-8	8,5-10	10,5-14	14,5-24
Belt Width (mm)	500					
Motor (kW-RPM)	1,1-70	1,5-70	2,2-70	3-70	4-70	5,5-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m <sup>3</sup> /hour] (tph)	25 to 35					



MODEL	T.BELT 023-100					
Belt Length (meter)	0-4	4,5-6	6,5-8	8,5-10	10,5-14	14,5-24
Belt Width (mm)	500					
Motor (kW-RPM)	1,1-70	1,5-70	2,2-70	3-70	4-70	5,5-70
Distance Between Rolls (Sheet Body) (mm)	530					
Distance Between Rolls (Profile Body) (mm)	500					
Capacity [m <sup>3</sup> /hour] (tph)	25 to 35					



**Belt Conveyors**